

Produktdatenblatt

Higo - F618A


Female panel mount



Push-on flexible

F618AM C 03 GA 0300

<https://www.higoconnector.ac-solutions.be/de/e-bike-steckverbinder/f618amc03ga0300>

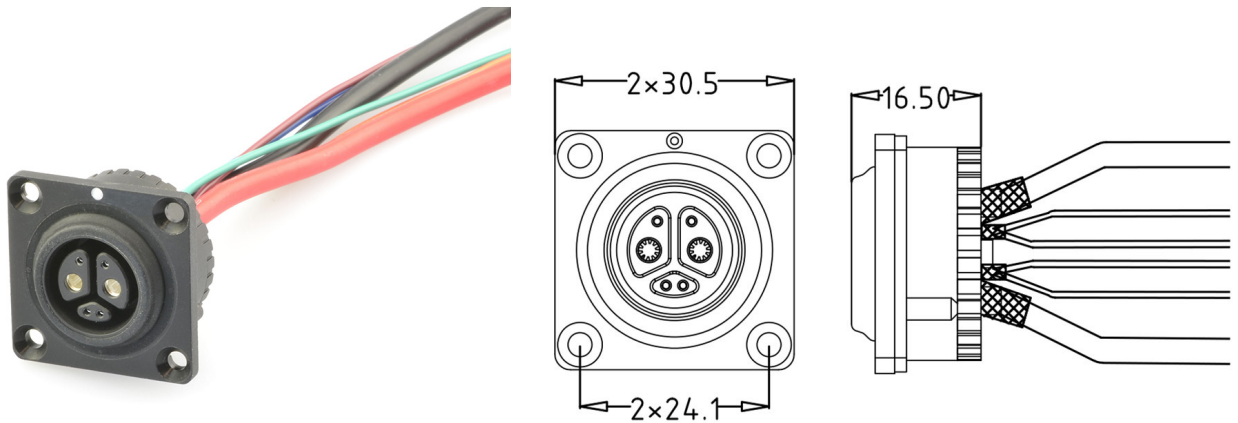

Spezifikationen

General Characteristics

x_number_of_contacts_detailed	6 (2+4)
x_connector_shape_detail	Panel mount
x_gender_detailed	Female
x_color	Black
x_upper_temperature	80 °C
x_lower_temperature	-25 °C
x_protection_degree	IP67
x_locking_detailed	Push-on flexible
x_mating_cycles	3000 Times
x_connector_diameter	30,5 x 30,5 mm
x_cable_length	300 mm
x_wire_section	2x3,3+ 4x0,20
x_remark	Other cable length/type on request

Produktdatenblatt

Higo - F618A

Female panel mount



Electrical Parameters

xRatedCurrent	30 / 2 A
xRatedVoltage	48 V AC / 60 V DC
xMaxInsulationResistance	?20 M?
xMaxContactResistance	?10 m?

Material

xInsulationWire	PVC
xMaterialOfContact	Copper alloy
xContactPlating	Silver plated