

Produktdatenblatt

Higo - Z624B




Battery male panel mount connector 48V code, no locking (push-on)



Only for use in 48V applications

Z624BG C 03 DR 0300

<https://www.higoconnector.ac-solutions.be/de/e-bike-steckverbinder/z624bgc03dr0300>

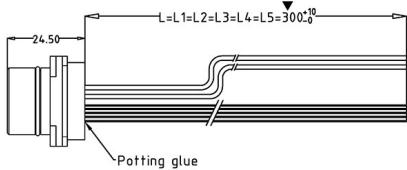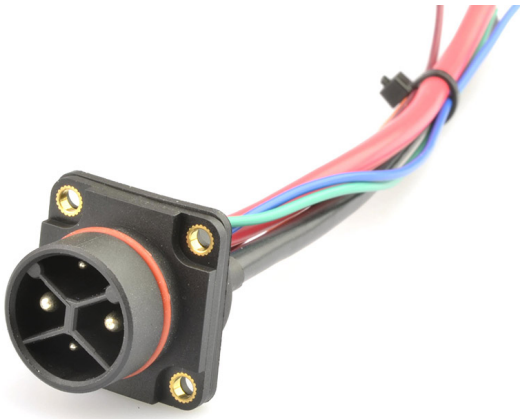

Spezifikationen

General Characteristics

x_number_of_contacts_detailed	6 (2+4)
x_connector_shape_detail	Panel mount
x_gender_detailed	Male
x_color	Black
x_upper_temperature	80 °C
x_lower_temperature	-25 °C
x_protection_degree	IP67
x_mating_cycles	3000 Times
x_connector_diameter	28.5 mm
x_cable_length	Single wires 300
x_wire_section	2 x 4,0 + 4 x 0,20
x_remark	Other cable length/type on request

Produktdatenblatt

Higo - Z624B

Battery male panel mount connector 48V code, no locking (push-on)



Electrical Parameters

xRatedCurrent	40 / 5 A
xRatedVoltage	48 V AC / 60 V DC
xMaxInsulationResistance	?20 M?
xMaxContactResistance	?10 m?

Material

xMaterialOfContact	Phosphor bronze
xContactPlating	Gold over Nickel